


## DELUXE VACUUM WELDING MACHINE (600MM, 2 MODELS)



SKU: EM600DX

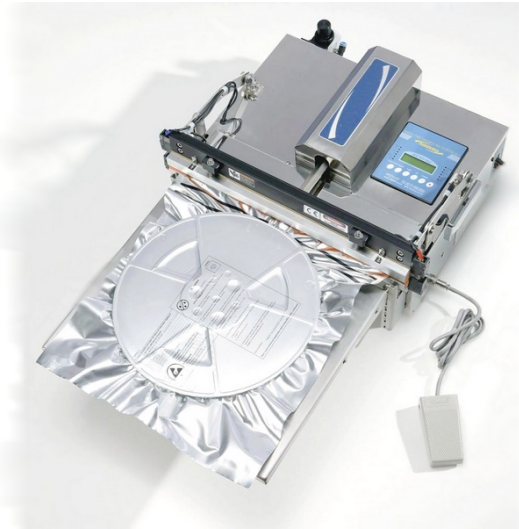

### VACUUM SEALER WITH 600 MM SEALING BAR

**Quickly creates a perfect vacuum with any type of bag**

**EM600DX - High-efficiency Deluxe line vacuum welding machine** equipped with pneumatic nozzle and **600 mm sealing bar** (single or double).

Fully programmable, foot operated, **ESD-safe**.

It allows to carry out nitrogen cycles by adding an additional kit (NOT included).

#### Available models:

- **Single sealing bar** (149411S) - Suitable for ESD barrier bags with thickness **up to 90 µm**
- **Double sealing bar** (149411U) - Suitable for ESD barrier bags with thickness **up to 150 µm**.

**Alternative models:** With 450 mm sealing bar (single or double) - With integrated nitrogen flushing kit (450 or 600 mm sealing bar, single or double).

#### ATTENTION:

The machine needs external compressed air for operating, and it needs a compressor with a capacity above 250 NI/min.



The pressure of compressed air supplied to the machine should be set at 5~6.5 kgf/cm<sup>2</sup>.  
 If the supplied compressed air exceeds 7 kgf/cm<sup>2</sup>, the machine could get damaged. In the other hand, if the compressed air is less than 4.5 kgf/cm<sup>2</sup>, there can be malfunctionings.

## VARIATIONS

SKU	Description	Configurazione
149411S		Single sealing bar
149411U		Double sealing bar