


DELUXE VACUUM WELDING MACHINE NITROGEN (600MM, 2 MODELS)



SKU: EM600DX/N

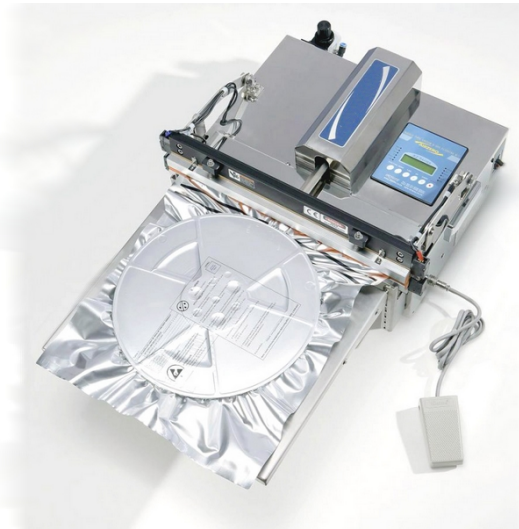

VACUUM SEALER WITH AIR WASHING KIT - 600MM

Quickly creates a perfect vacuum with any type of bag

EM450DX/N - Deluxe series high efficiency vacuum welding machine equipped with pneumatic nozzle, **600 mm sealing bar** (single or double) and **nitrogen flushing kit**.

Fully programmable, foot operated, **ESD safe**.

Available models:

- **Single sealing bar** (149411Q) - Suitable for ESD barrier bags with thickness **up to 90 µm**
- **Double sealing bar** (149411P) - Suitable for ESD barrier bags with thickness **up to 150 µm**.

Alternative models: With 450 mm sealing bar (single or double) - Without nitrogen cycles' kit (single or double sealing bar).

ATTENTION:

The machine needs external compressed air for operating, and it needs a compressor with a capacity above 250 NI/min. The pressure of compressed air supplied to the machine should be set at 5~6.5 kgf/cm².



If the supplied compressed air exceeds 7 kgf/cm², the machine could get damaged. In the other hand, if the compressed air is less than 4.5 kgf/cm², there can be malfunctionings.

VARIATIONS

| SKU | Description | Configurazione |
|---------|-------------|--------------------|
| 149411Q | | Single sealing bar |
| 149411P | | Double sealing bar |