


ESD FLOOR MAT KIT WITH GROUNDING CORD (122X190CM, TH.2.5MM)



SKU: 131794X

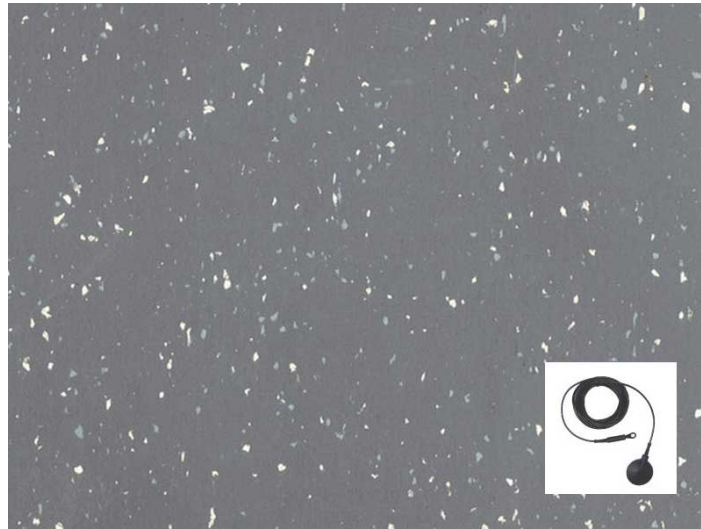

ANTISTATIC FLOOR MAT WITH CABLE, 2.5MM

ESD safe flooring kit, including:

- **Quickstat Deluxe ESD safe floor mat** made of high quality rubber:
 - Dimensions: **122 x 190 cm** (+/- 1 cm) – Thickness: **2.5 mm**
 - Colour: **Light Grey**
 - Connection: Male snap button (Ø 10 mm), placed at one of the corners.
- **Grounding cable** (El.Mi product no. 640032B):
 - Length: **3 m**
 - Connections: Covered type Female snap button / Eyelet
 - Equipped with a built-in 1 MOhm resistor.

Quickstat Deluxe ESD safe mats

Installing Quickstat floor mats is extremely easy, quick and cost-effective.



Unlike most of ESD safe floor mats, Quickstat mats' conductivity depends to the **highly conductive lower side**. For this reason, Quickstat mats can be simply layed by using a common **bi-adhesive tape** (for small areas) or **conductive glue**, making possible an effective installation at extremely low costs.

A **copper grid** on the sub-floor is required for grounding.

ATTENTION: In case of gluing, the laying of Quickstat requires rising damp values of less than 2%.